


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED



**Fits Vorne Productivity Unit:
XL800-32160T (Not Included)**

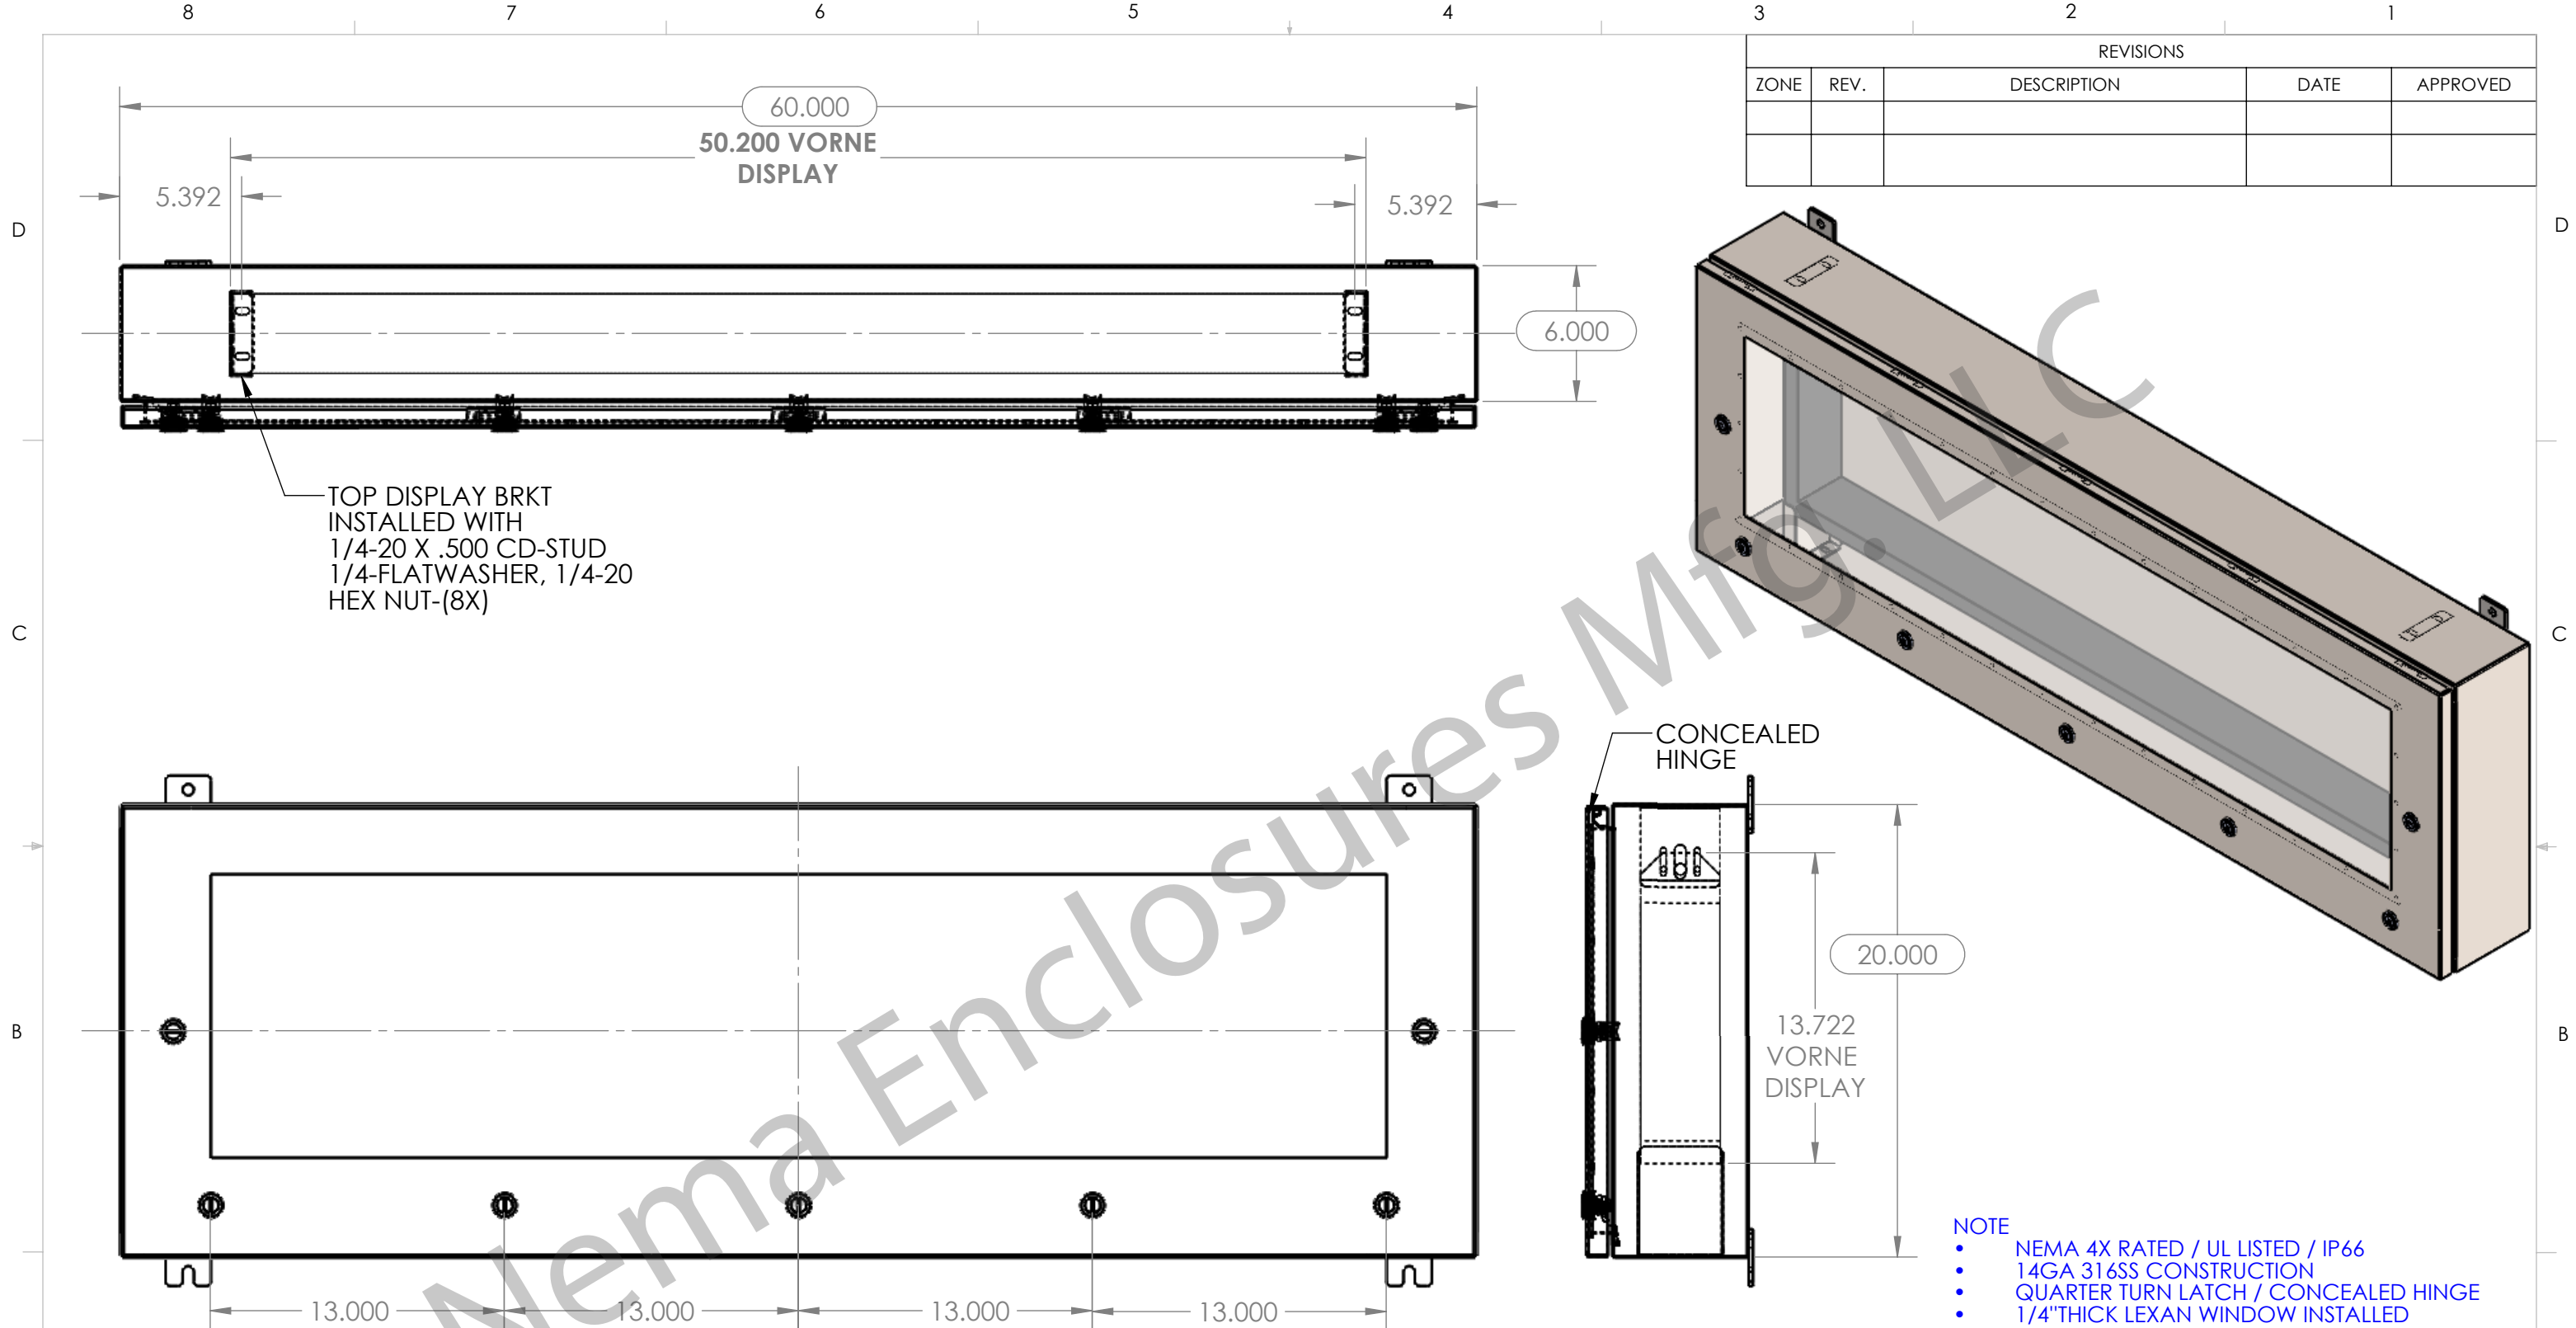

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
NEMA ENCLOSURES. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
NEMA ENCLOSURES IS
PROHIBITED.


UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/16
ANGULAR: MACH ±1°
HOLE +.004/-001 (LASER ONLY)
ONE PLACE DECIMAL ±.0625
TWO PLACE DECIMAL ±.030
THREE PLACE DECIMAL ±.015
POWDER COAT STANDARD 2 MIL ±.5 MIL

	NAME	DATE
DRAWN	OD	9/28/16
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
MATERIAL	14ga 316 SS	
FINISH	BRUSHED	
DO NOT SCALE DRAWING		



DESIGNABOX™	
TITLE: NEMA ENCLOSURES 20" H X 60" W X 6" D NEMA 4X/IP66 FABRICATION	
DWG. NO. CHDSS6206006VD	REV
SCALE: 1:9	WEIGHT:
SHEET 1 OF 5	

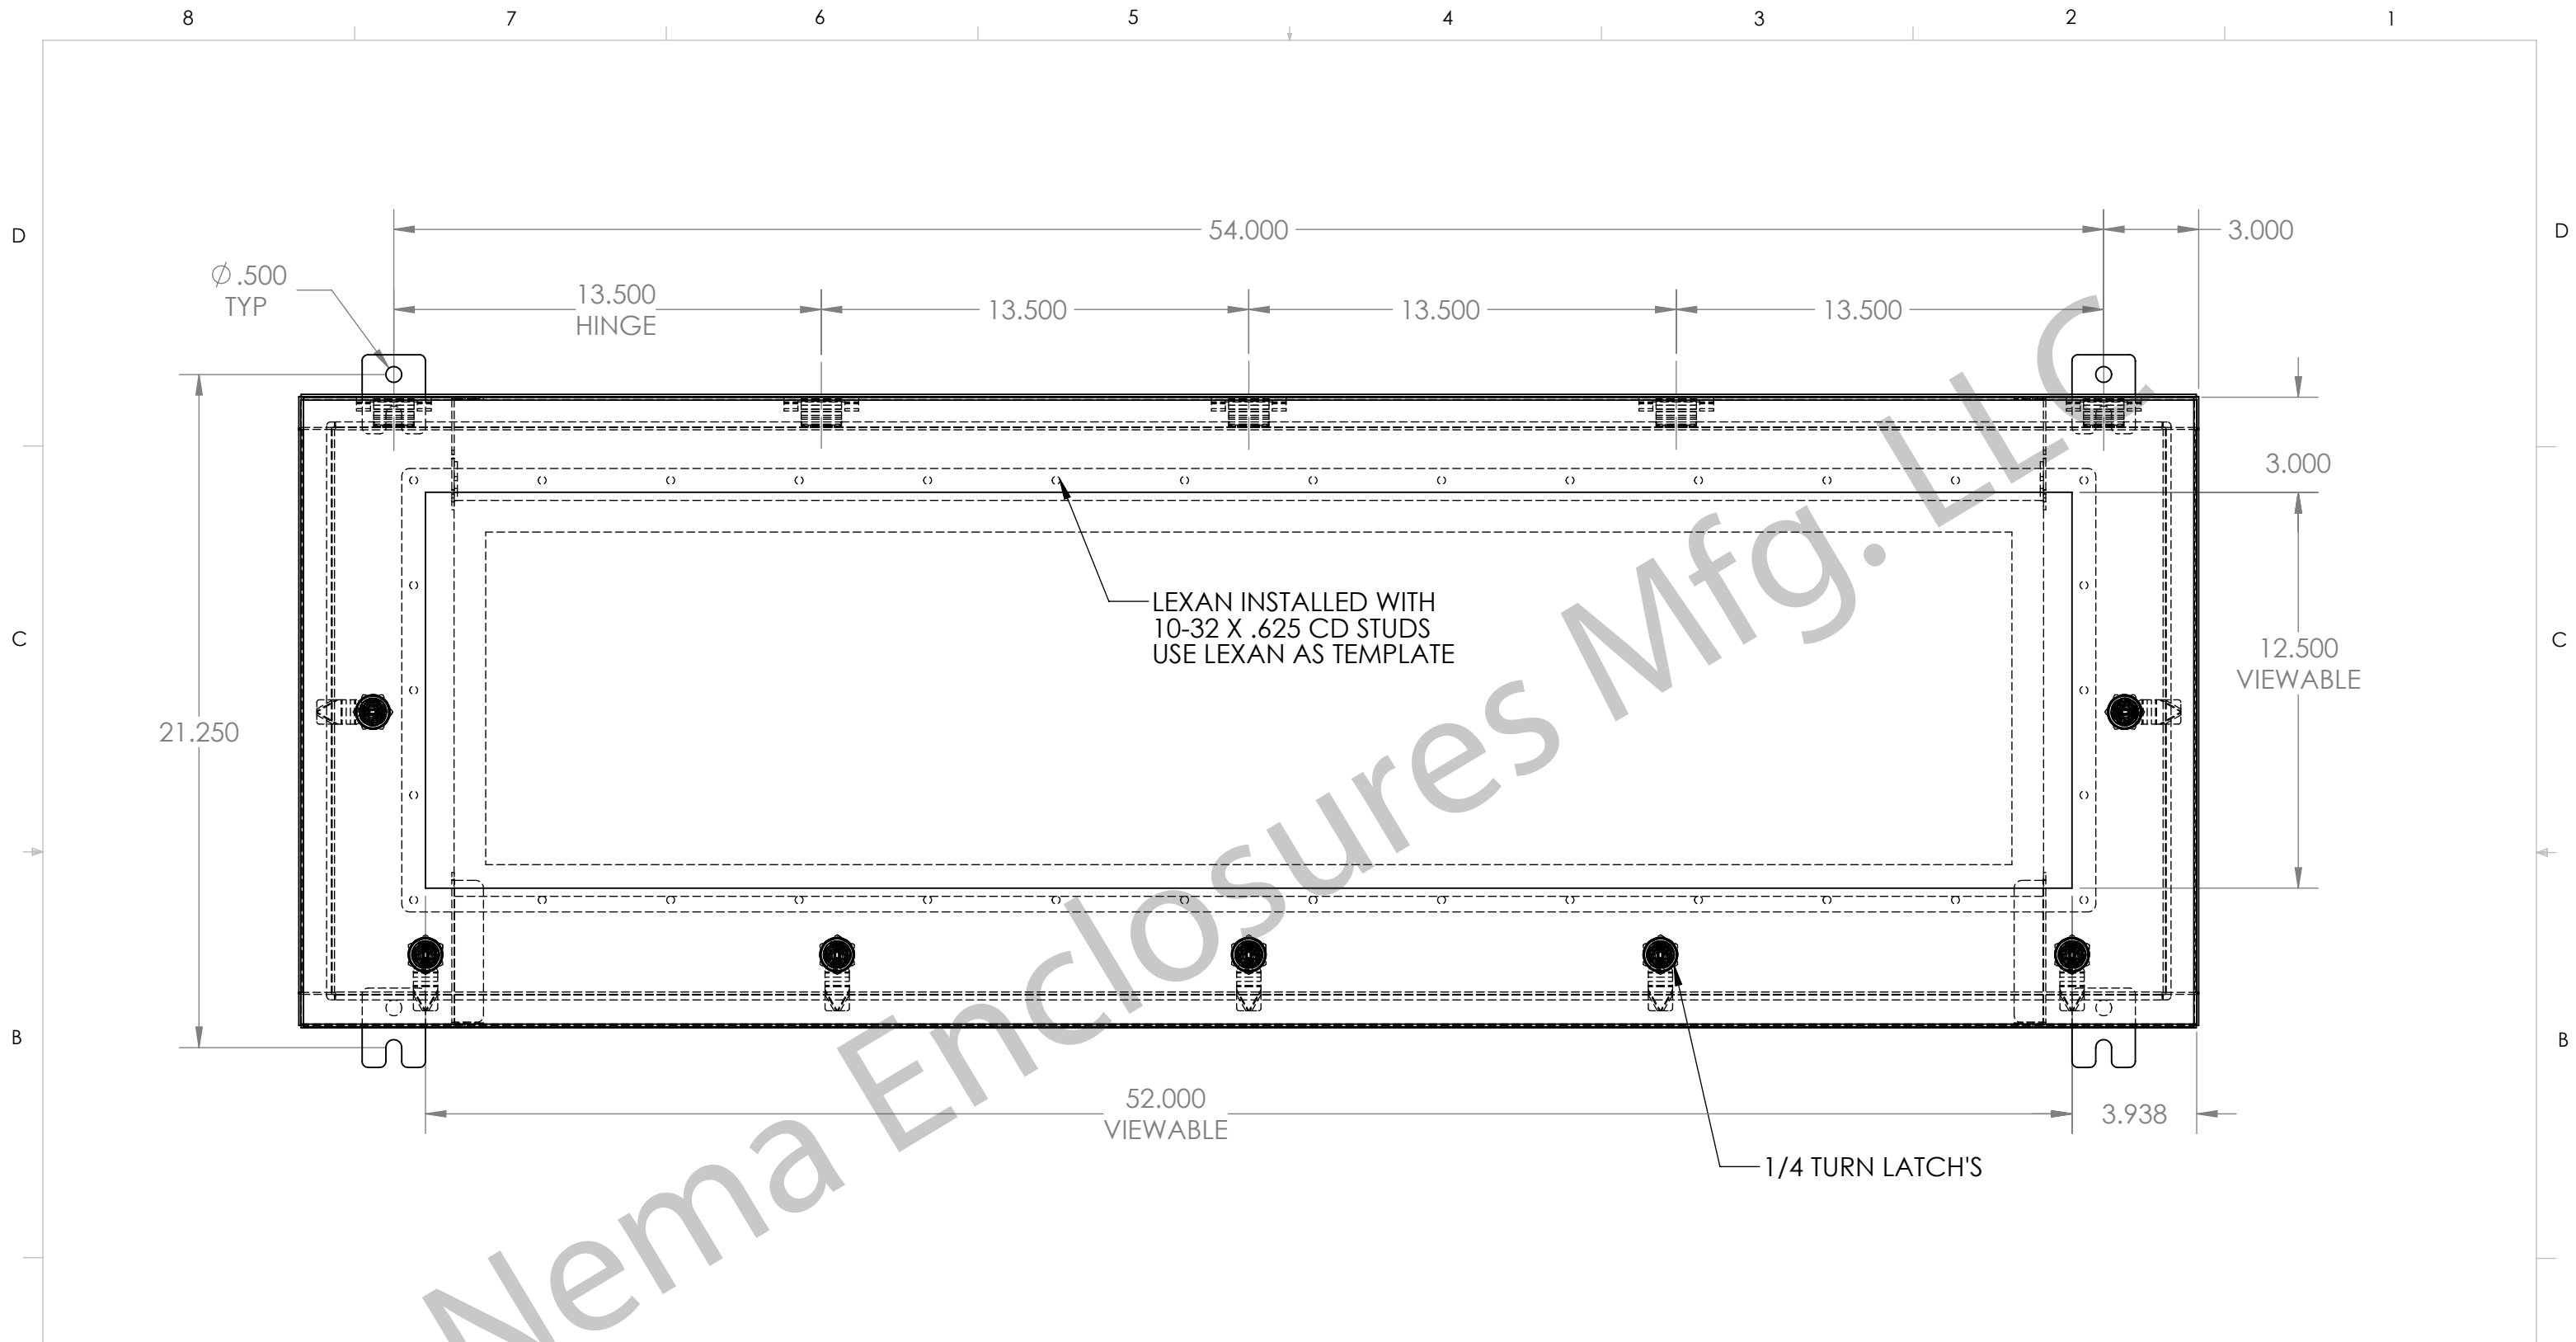

Nema Enclosures Mfg. LLC



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NEMA ENCLOSURES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NEMA ENCLOSURES IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL: ±1/16
 ANGULAR: MACH ±1°
 HOLE: +.004/-0.001 (LASER ONLY)
 ONE PLACE DECIMAL: ±.0625
 TWO PLACE DECIMAL: ±.030
 THREE PLACE DECIMAL: ±.015
 POWDER COAT STANDARD 2 MIL ±.5 MIL

	NAME	DATE
DRAWN	OD	9/28/16
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
MATERIAL	14ga 316 SS	
FINISH	BRUSHED	
DO NOT SCALE DRAWING		



DESIGNABOX™	
TITLE: NEMA ENCLOSURES 20" H X 60" W X 6" D NEMA 4X/IP66 FABRICATION	
DWG. NO. CHDSS6206006VD	REV
SCALE: 1:9	WEIGHT:
SHEET 2 OF 5	